



TERRAMAX 920

ECO-FRIENDLY FLOORING PRODUCTS

ADVANCED POLYMER
WOOD FLOOR ADHESIVE



PRODUCT DESCRIPTION:

TerraMax 920 Wood Floor Adhesive is an advanced polymer adhesive containing 100% solids. The product provides strong adhesion and shear strength – while containing no solvents and low VOCs. It is formulated for interior installation of all types of wood flooring including solid wood, engineered wood up to 3/4 in. thick, and bamboo flooring – as well as acrylic flooring. TerraMax 920 Wood Floor Adhesive is a favorite of installers, because the one component formulation doesn't require flash time, yet makes it easy to spread and easy to clean up.

DIRECTIONS FOR USE:

Read and understand data sheet completely before beginning installation. Follow industry standards, as well as hardwood flooring manufacturer's recommendations for acclimation, design, layout and application of wood flooring material. If jobsite conditions are outside of flooring manufacturer's recommendations, take necessary corrective actions.

SURFACE PREPARATION:

Surfaces must be clean, dry and flat, free of voids, projections, loose materials, oil, grease, sealers and all other surface contaminants. Completely remove any adhesive residue or surface contamination by diamond grinding, shot blasting or scarifying. Wood should test less than 12% moisture using a wood moisture meter. To ensure proper adhesion to concrete, surface texture must be similar to light broom finished; concrete should NOT be smooth or reflective. Areas requiring patching or leveling must be done using a Portland cement-based material. Maximum acceptable floor variation is 3/16" in 10 feet.

FEATURES:

- Single-Component, No mixing
- Ease of spread
- Easy clean-up
- VOC Compliant / Low VOC's
- Anti-microbial Formula

APPLICATIONS:

- Engineered hardwood flooring
- Acrylic impregnated hardwood flooring
- Finished & unfinished solid wood
- Parquet
- Bamboo



CURING:

Humidity affects cure to a greater degree than temperature; the higher the humidity, the faster the cure. Under normal conditions, light foot traffic is acceptable after 6 to 8 hours; normal traffic after 12-16 hours.

STORAGE/SHELF LIFE:

Material is to be stored under controlled dry environment (below 75° F). Use within 6 months from date of manufacture, if stored in unopened container.

CLEAN-UP:





As you work, immediately clean any adhesive from prefinished flooring with mineral spirits (be careful not to harm finish).

LIMITATIONS:

Do not use on wet, dusty, contaminated, glassy smooth or friable substrates; do not use over substrates/slabs treated with sealers or curing compounds; do not use in areas subject to hydrostatic head.

TROWEL SELECTOR GUIDE/ COVERAGE CHART:

Trowel size is suggested to maximize coverage of adhesive. Periodically check coverage of adhesive during installation: >80% coverage is required for all engineered wood flooring; >95% coverage is required for all solid wood flooring products. Please note: It is the installer's responsibility to apply the proper amount of adhesive for the job condition.

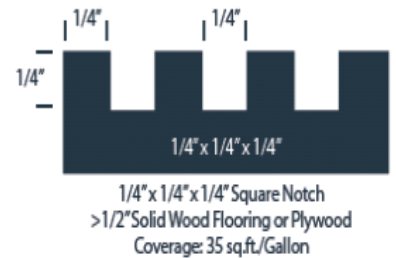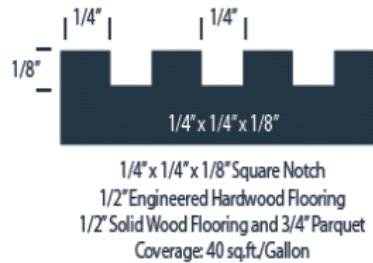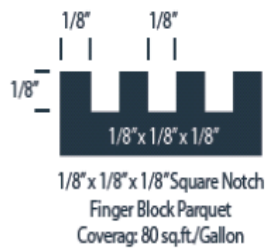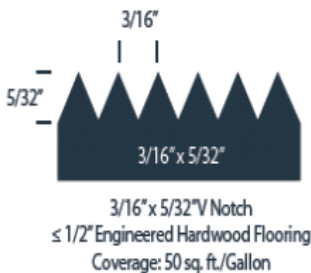

PACKAGING:

- 1 Gallon Pail: 60 pails/pallet
- 3.5 Gallon Pail: 48 pails/pallet
- 4 Gallon Pail: 48 pails/pallet
- 5 Gallon Pail: 36 pails/pallet
- 55 Gallon Drum



PAILS



55GAL DRUMS

LIMITED LIFETIME WARRANTY:

This product is guaranteed to give satisfactory performance if applied in accordance with the label directions. Liability to Premier Building Solutions, Inc. (Premier) is limited to a full refund of the purchase price or product replacement if product is proven defective. Premier shall not be liable for loss or damage, whether direct, consequential or incidental. There are no other warranties expressed or implied including the implied warranty of merchantability or fitness for a particular purpose.

Premier Building Solutions specifically disclaims and makes no warranties, express or implied, about this product, its merchantability, or its fitness for a particular purpose. All recommendations, directions, and suggestions for its use are consistent with our testing and research for a variety of applications, but no promises, guarantees, or warranties are being made with regard to its use, whether or not consistent with the directions, or its effectiveness for any given application. Users of this product should do so in compliance with all applicable laws and regulations. Users of this product must conduct their own field test, to assure results.