



# TERRAMAX 925

ECO-FRIENDLY FLOORING PRODUCTS

ADVANCED POLYMER  
**HIGH PERFORMANCE**  
WOOD FLOOR ADHESIVE



### PRODUCT DESCRIPTION:

TerraMax 925 is an all-in-one, single step, advanced polymer floor adhesive. The high performance formula drastically reduces the installation time. It delivers superb bond & shear strength in an easy spread, easy clean-up product that requires no mixing or set up time.

TerraMax 925 HIGH PERFORMANCE Wood Floor Adhesive contains no water or solvents and very low VOCs, so it's easy on installers and the environment. This is the product of choice when the application demands the highest performance adhesive available.

### DIRECTIONS FOR USE:

Read and understand data sheet completely before beginning installation. Follow industry standards, as well as hardwood flooring manufacturer's recommendations for acclimation, design, layout and application of wood flooring material. If jobsite conditions are outside of flooring manufacturer's recommendations, take necessary corrective actions.

### SURFACE PREPARATION:

Surfaces must be clean, dry and flat, free of voids, projections, loose materials, oil, grease, sealers and all other surface contaminants. Completely remove any adhesive residue or surface contamination by diamond grinding, shot blasting or scarifying. Wood should test less than 12% moisture using a wood moisture meter. To ensure proper adhesion to concrete, surface texture must be similar to light broom finished; concrete should NOT be smooth or reflective. Areas requiring patching or leveling must be done using a Portland cement-based material. Maximum acceptable floor variation is 3/16" in 10 feet.

### FEATURES:

- Single-Component, No mixing
- Ease of spread
- Easy clean-up
- VOC Compliant / Low VOC's
- Anti-microbial Formula

### APPLICATIONS:

- Engineered hardwood flooring
- Finished & Unfinished Solid Wood
- Bamboo
- Acrylic impregnated hardwood flooring



**CURING:**

Humidity affects cure to a greater degree than temperature; the higher the humidity, the faster the cure. Under normal conditions, light foot traffic is acceptable after 6 to 8 hours; normal traffic after 12-16 hours.

**STORAGE/SHELF LIFE:**

Material is to be stored under controlled dry environment (below 75° F). Use within 6 months from date of manufacture, if stored in unopened container.

**CLEAN-UP:**





As you work, immediately clean any adhesive from prefinished flooring with mineral spirits (be careful not to harm finish).

**LIMITATIONS:**

Do not use on wet, dusty, contaminated, glassy smooth or friable substrates; do not use over substrates/slabs treated with sealers or curing compounds; do not use in areas subject to hydrostatic head.

**TROWEL SELECTOR GUIDE/ COVERAGE CHART:**

Trowel size is suggested to maximize coverage of adhesive. Periodically check coverage of adhesive during installation: >80% coverage is required for all engineered wood flooring; >95% coverage is required for all solid wood flooring products. Please note: It is the installer's responsibility to apply the proper amount of adhesive for the job condition.

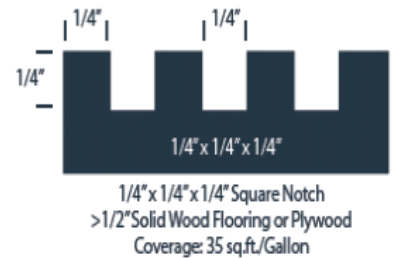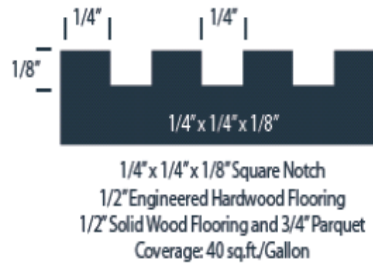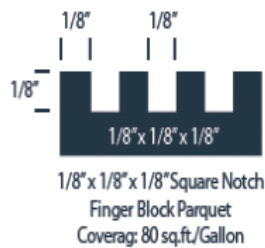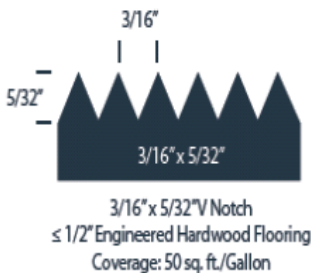

**PACKAGING:**

- 1 Gallon Pail: 60 pails/pallet
- 3.5 Gallon Pail: 48 pails/pallet
- 4 Gallon Pail: 48 pails/pallet
- 5 Gallon Pail: 36 pails/pallet
- 55 Gallon Drum



**PAILS**



**55GAL DRUMS**

**LIMITED LIFETIME WARRANTY:**

This product is guaranteed to give satisfactory performance if applied in accordance with the label directions. Liability to Premier Building Solutions, Inc. (Premier) is limited to a full refund of the purchase price or product replacement if product is proven defective. Premier shall not be liable for loss or damage, whether direct, consequential or incidental. There are no other warranties expressed or implied including the implied warranty of merchantability or fitness for a particular purpose.

Premier Building Solutions specifically disclaims and makes no warranties, express or implied, about this product, its merchantability, or its fitness for a particular purpose. All recommendations, directions, and suggestions for its use are consistent with our testing and research for a variety of applications, but no promises, guarantees, or warranties are being made with regard to its use, whether or not consistent with the directions, or its effectiveness for any given application. Users of this product should do so in compliance with all applicable laws and regulations. Users of this product must conduct their own field test, to assure results.